



PLAN OF COVER & FRAME

Plastic caps on the lifting key hole.

M-10 316 SS Allen Bolt - (4-Nos)

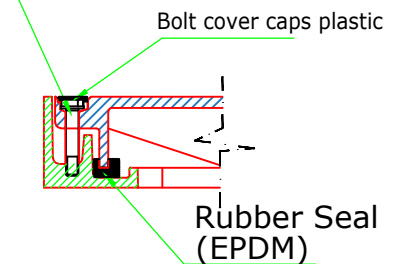


**Sectional View -M
 Lockable Area**

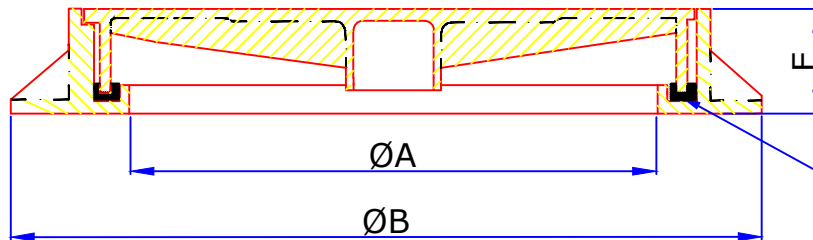

SECTIONAL VIEW

Rubber Seal (EPDM)

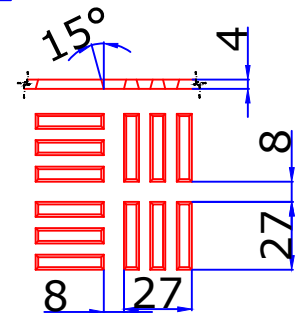

**RAISED PATTERN DETAILS
 RAISED PATTERN THICKNESS 4.0MM**

- Note :-Anti -Slip Design .
 :- Cover seating surface area will machine if required .
 :- Black Bituminous Paint.

CODE	CLEAR OPENING Ø A (MM)	OVER BASE ØB (MM)	FRAME HEIGHT E (MM)	LOADING kN	STANDARD
DA-4	Ø600	Ø 800	100	400 kN	AS3996-2019

DATE : 03-07-19	DESCRIPTION : 600 MM DIA CLEAR OPENING DUCTILE IRON LOADING CLASS E 400kN CIRCULAR SINGLE SEAL COVER & FRAME WITH RUBBER SEAL & BOLTED .	REV : 01
APP.BY: PC		SCALE : NTS
CHECKED BY: AAB		ALL DIMENSIONS ARE
DRAWN BY : MKC		IN MM