



PLAN

Plastic caps on the lifting key hole.

M-10 316 SS Allen Bolt - (4-Nos)

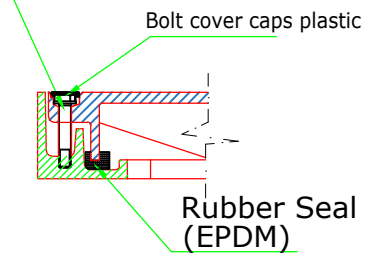


**Sectional View -M
 Lockable Area**

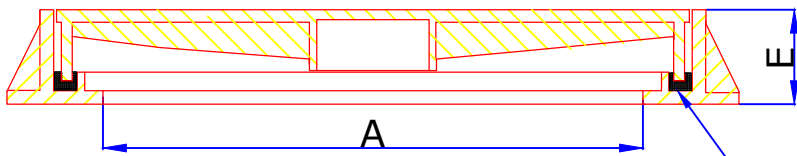

SECTIONAL VIEW OF COVER & FRAME

Rubber Seal (EPDM)

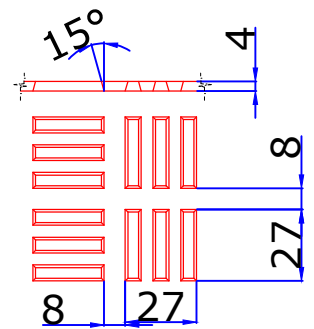

RAISED PATTERN DETAILS

RAISED PATTERN THICKNESS 4.0MM

- Note :-Anti -Slip Design.
 :- Cover seating surface area will be machined if required .
 :- Black Bituminous Paint .

CODE	CLEAR OPENING A (mm)	OVER BASE BXC (mm)	DEPTH E (mm)	LOADING kN	STANDARD
DA-5SEW	Ø600	750x750	75	80 kN	AS3996-2019

DATE : 24-06-19	DESCRIPTION : 600 MM DIA CLEAR OPENING DUCTILE IRON LOADING CLASS B 80kN CIRCULAR SINGLE SEAL COVER & FRAME WITH RUBBER SEAL & BOLTED .	REV : 0
APP.BY: PC .		SCALE : NTS
CHECKED BY: AAB.		ALL DIMENSIONS ARE
DRAWN BY : MC .		IN MM