



PLAN

Plastic caps on the lifting key hole.

M-10 316 SS Allen Bolt - (4-Nos)

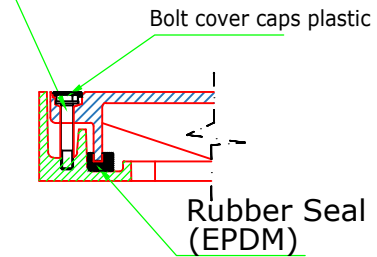


Sectional View -M Lockable Area

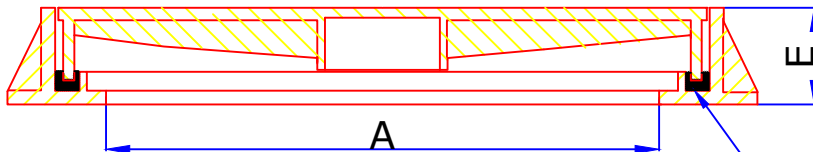

SECTIONAL VIEW OF COVER & FRAME

Rubber Seal (EPDM)

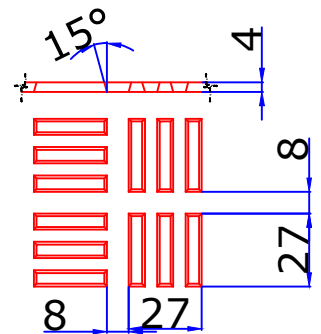

**RAISED PATTERN DETAILS**  
**RAISED PATTERN THICKNESS 4.0MM**

Note :-Anti -Slip Design.

:- Cover seating surface area will be machined if required .

:- Black Bituminous Paint .

CODE	CLEAR OPENING A (mm)	OVER BASE BXC (mm)	DEPTH E (mm)	LOADING kN	STANDARD
DA-5	Ø600	750x750	75	80 kN	AS3996-2019

DATE : 03-07-19

APP.BY: PC .

CHECKED BY: AAB.

DRAWN BY : MKC .

DESCRIPTION :

600 MM DIA CLEAR OPENING DUCTILE  
IRON LOADING CLASS B 80kN CIRCULAR  
SINGLE SEAL COVER & FRAME  
WITH RUBBER SEAL & BOLTED .

REV : 0

SCALE : NTS

ALL DIMENSIONS ARE  
IN MM